

CUMMINS SERIES



MODEL AC275 KAN GENSET **275KVA/220KW**



General Performance Data



Prime Power	250KVA/200KW	Engine	Brand	Cummins
Stand by Power	275KVA/220KW		Model	6LTAA8.9-G2
Frequency/Speed	60Hz/1800rpm	Control module	Deepsea 6120	
Rated Power Factor(cosφ)	0.8	Rated Current	656A	
Standard Voltage	127V/220V	Capacity of Breaker	800A	
Phases	3	Starting Voltage	DC24V	

Fuel consumption

Rated output	Fuel consumption rate	
100%Standby	210g/KW.h	66L/h
100%Prime	208g/KW.h	59L/h
75%Prime	206g/KW.h	44L/h
50%Prime	211g/KW.h	30L/h
25%Prime	240g/KW.h	17L/h

Standards followed

ISO9001	ISO14001
ISO8528	ISO12100
ISO13849	EN12601
GB12786	GB/T2820
IEC60034	IEC60204
CE	RETIE

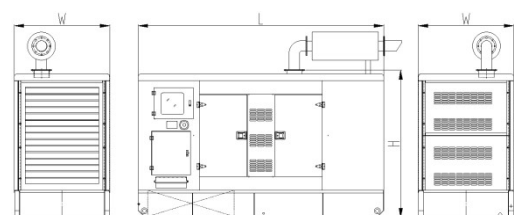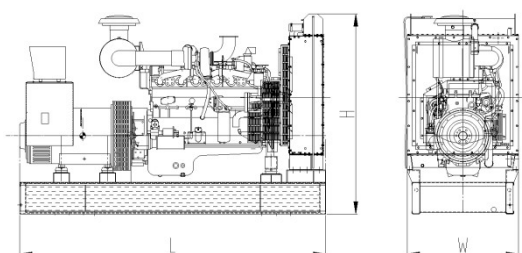

Dimensions and Weights

Type	Open	Silent
Length(mm)	2450	3600
Width(mm)	950	1150
Height(mm)	1800	2000
Weight(kg)	1850	2700
Base fuel tank volume (L)	420	420

Engine specification

Basic parameter

Manufacturer	dongfeng Cummins
Model	6LTAA8.9-G2
No. of cylinder	6
Type	4 cycle, Vertical In-line
Prime Power	235kw /315HP
Standby Power	258kw /346HP
Induction system	Turbocharged and Air to Air After cooled
Governor	Electronic speed
Bore x Stroke	114x145mm
Displacement	8.9L
Compression ratio	16.6:1
Oil Capacity(Total)	27.6L
Coolant Capacity(Engine only)	11.1L
Cranking Motor Voltage	DC24V

Fuel System

Type Injection system	North Oil P7100 inline pump
Min. Allowable flow of fuel to fuel pump	66 L/h

Lubrication system

Oil Pressure	
---Idle speed	103kPa
---Rated speed	276-414kPa
Max. allowable oil temperature	121°C
Offset sump oil capacity: low/high	N /A
Total system capacity	27.6L

Air induction system

Maximum allowable intake air restriction	
---with clean filter element	3.7kPa
---with dirty filter element	6.2kPa

Intake Air alarm temperature	82°C
------------------------------	------

Exhaust system

Max. allowable back pressure	10kPa
Standard exhaust pipe diameter	75mm

Cooling system

Coolant capacity	
---Engine only	11.1L
---Total system	34 L
---With heat exchanger	22.9L
Standard thermostat(modulating) range	82-95 °C
Minimum cap pressure	103kPa
Max. allowable top tank temperature for stand by/prime power	104/100 °C

Electric system

Min. recommended battery capacity (24V)	
---10°C(50°F) & above- 0°F CCA	750
--- 0°C(32°F) to 10°C(50°F)- 0°F CCA	750
---18°C(0°F) to 0°C(32°F)- 0°F CCA	750
Max. allowable resistance of Starting circuit	0.002ohm
Starter(heave , Anode)	DC24V
Battery recharge system, negative ground	70ampere



Alternator specification

Phases	3	Coating	Vacuum impregnation
Poles	4	Insulation class	H
Power factor(cosφ)	0.8	Protection	IP23
Winding connection	Star	Excitation system	Self-excited
Winding pitch	2/3	Bearing	Single Bearing
Voltage regulator type	AVR	Coupling	Flexible disc

Control system Introduction

Deepsea 6120 Auto start & auto mains failure control panel

Deepsea 6120 is an auto mains failure controller for single generator, it can monitor and protect the generator working all the time. it has a LCD display which clearly shows the status of the engine. this controller include seven inputs and six outputs. This controller can also be programmed using the front panel or by using DSE configuration Suite PC software

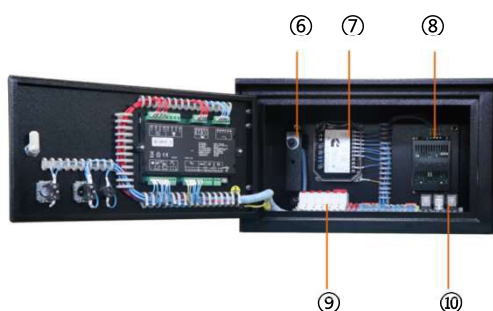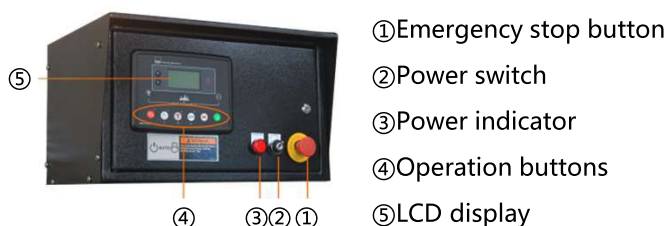

Key Features:

- Auto start/stop, load transfer and alarming of generator
- Remote start on or off load
- With hierarchical loading function
- Multiple start/stop cycles can be preset
- 3 phase generator and mains voltage monitoring.
- Generator/load power detection(kW, kVA, kVA_r PF)
- Overload protection (kW)
- Load current monitoring and protection
- Engine speed protection
- Engine pre-heat
- Engine start idle & stop idle
- Battery voltage monitoring
- Start under the low battery
- 4 active outputs
- 4 digital inputs and 3 analogue inputs.
- 6 Custom digital input
- 6 outputs(4 configurable on magnetic pick-up, 6 configurable on Canbus version)
- DSE2130,DSE2157,DSE2548 expansion module can be connected
- Support 0-10V or 4-20mA oil pressure sensor


Main features:

- Multi language display
- Mains failure self starting
- The running time of the engine can be recorded to facilitate the maintenance and repair of the unit
- User-friendly set-up and button layout
- LCD display can display multiple parameters at the same time
- Support EFI engine
- IP65 rating (with optional gasket)
- PC and front panel configuration
- 100 event records
- Data recording and trend analysis


Protection:

- Two sets of protection parameters can be preset
- Normal alarm, electrical trip and shutdown alarm can be set to effectively monitor the engine speed,oil pressure, water temperature and oil level, as well as the frequency, voltage, current and power of the alternator, for complete engine/alternator protection
- Low Oil Pressure
- High water Temperature
- High voltage and low voltage
- Overspeed
- Emergency stop
- Fail to start

Decomposition diagram introduction of Typical Canopy

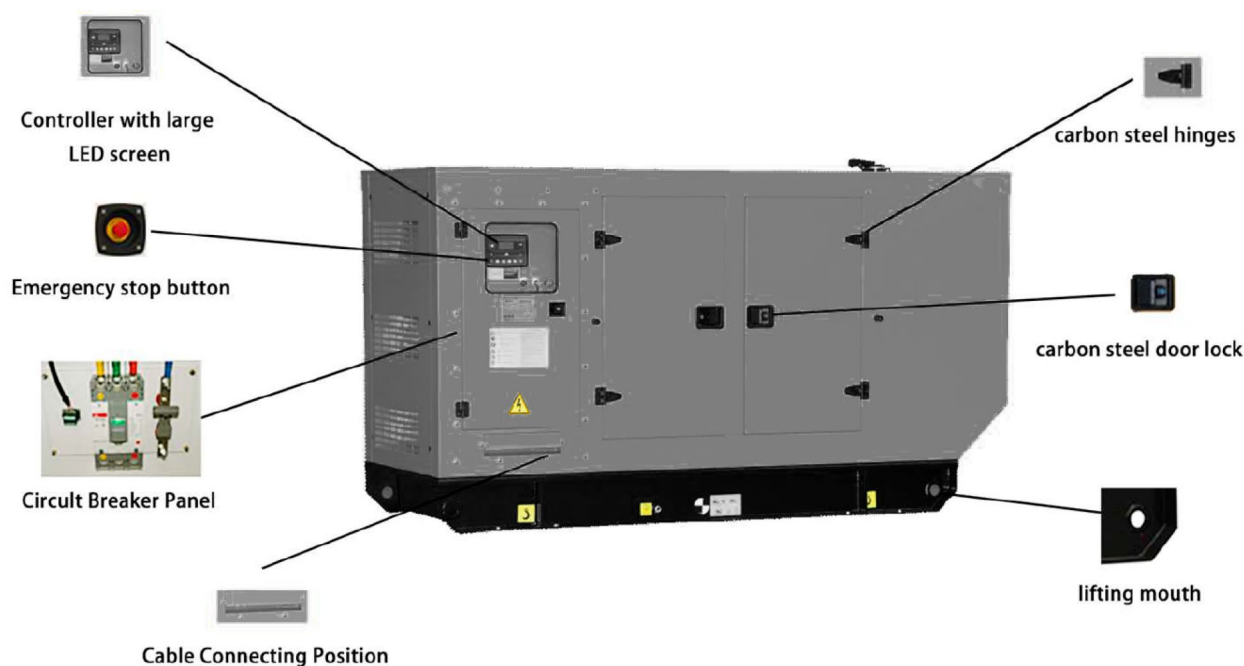

Standard supply scope:

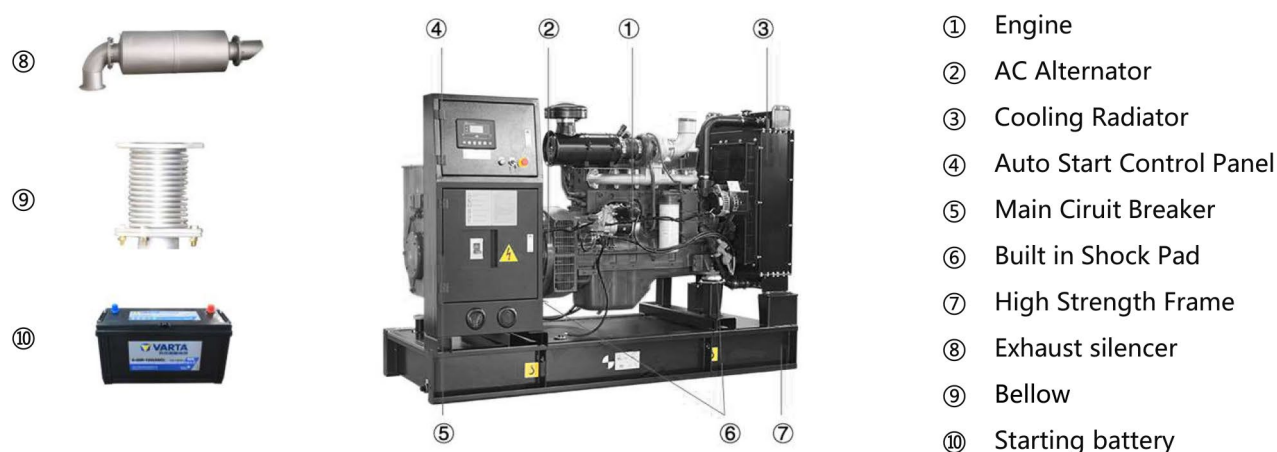

Optional supply scope:

Genset	Engine	Alternator	Control system
- Tool box - Base fuel tank - External daily fuel tank - Trailer	- Fuel heater - Fuel and water separator	- Temp. detector for winding and bearing - PMG - Antirust, mildew and salt fog treatment - Anti condensation heater	- ATS - Synchronization System - Adjustable earth relay
Breaker	Fuel system	Lub-oil system	Cooling system
- ABB - Schneider	- Low fuel level alarm - Auto Fuel Pump - T Valve	- Lub oil heater - Temp.-sensor - Oil drain Pump	Elec.coolant Heater